


Measuring Inductance

What is needed?

For these measurements we need:

- Function Generator.
- Oscilloscope
- the coil to be tested

Setup

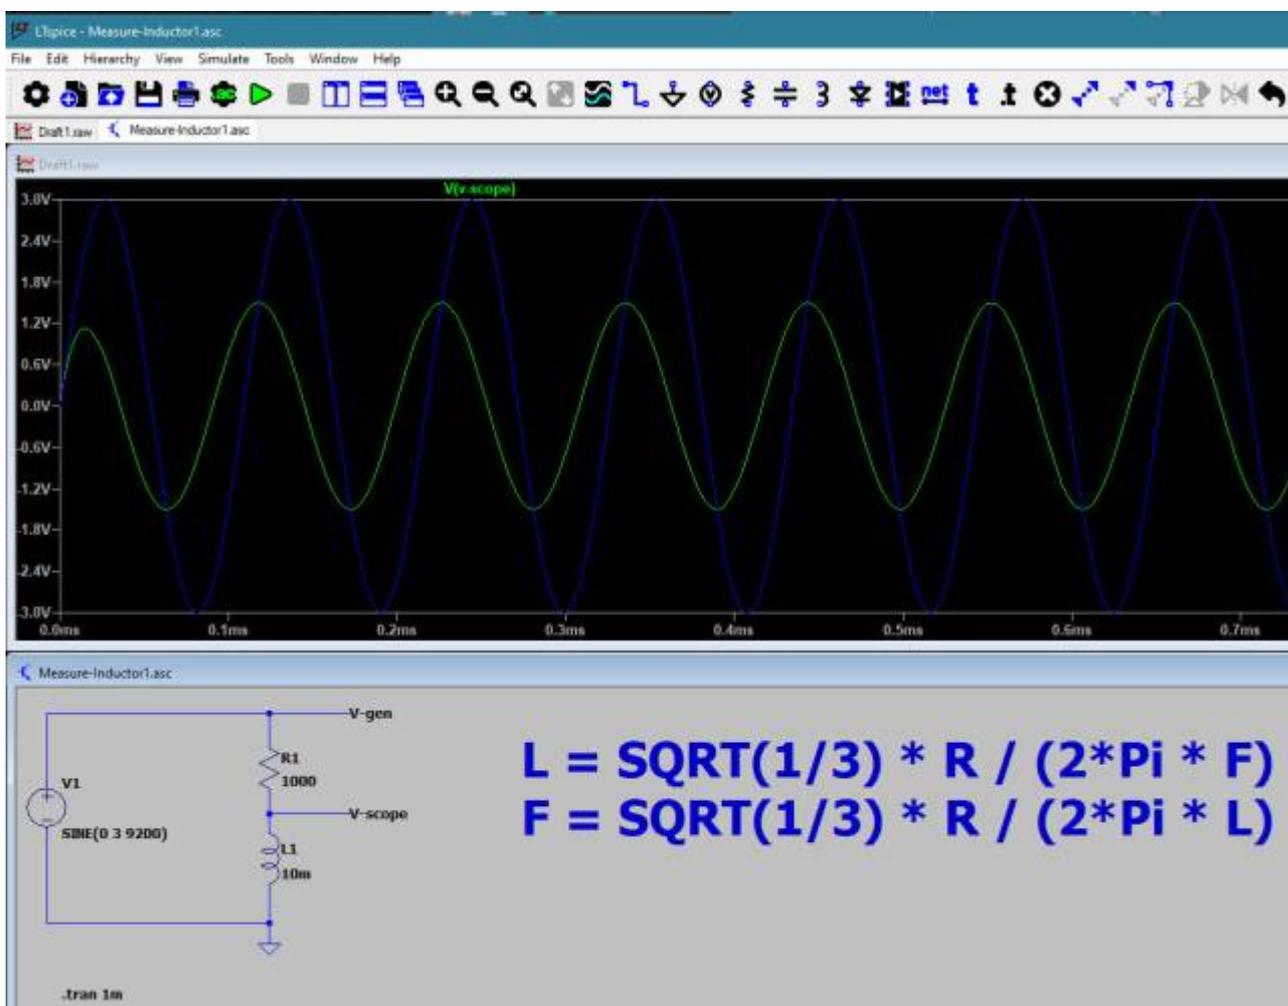

Formulas

$$\begin{aligned} \left| \frac{V_{scope}}{V_{gen}} \right| &= \left| \frac{j\omega L}{R + j\omega L} \right| = \left| \frac{j\omega L}{R + j\omega L} \cdot \frac{R - j\omega L}{R - j\omega L} \right| = \left| \frac{j\omega RL + \omega^2 L^2}{R^2 + \omega^2 L^2} \right| = \\ & \left| \frac{\omega^2 L^2}{R^2 + \omega^2 L^2} + j \frac{\omega LR}{R^2 + \omega^2 L^2} \right| = \sqrt{\left(\frac{\omega^4 L^4}{(R^2 + \omega^2 L^2)^2} + \frac{\omega^2 L^2 R^2}{(R^2 + \omega^2 L^2)^2} \right)} = \\ & \frac{\sqrt{\omega^4 L^4 + \omega^2 L^2 R^2}}{(R^2 + \omega^2 L^2)} = \frac{\sqrt{\omega^2 L^2 (R^2 + \omega^2 L^2)}}{(R^2 + \omega^2 L^2)} = \frac{\omega L}{\sqrt{R^2 + \omega^2 L^2}} \end{aligned}$$

$$\left| \frac{V_{scope}}{V_{gen}} \right| = \frac{1}{2} \Rightarrow \frac{\omega L}{\sqrt{R^2 + \omega^2 L^2}} = \frac{1}{2}$$

$$\frac{\omega^2 L^2}{R^2 + \omega^2 L^2} = \frac{1}{4}$$

$$4\omega^2 L^2 = R^2 + \omega^2 L^2$$

$$L^2 = \frac{R^2}{3\omega^2}$$

$$L = \sqrt{\frac{1}{3} \frac{R}{\omega}} = \sqrt{\frac{1}{3} \frac{R}{2\pi f}} \rightarrow L = \sqrt{\frac{1}{3} \frac{R}{2\pi f}} = \sqrt{\frac{1}{3} \frac{50}{2\pi f}} = \frac{4.57}{f}$$

Links

<https://www.dos4ever.com/inductor/inductor.html>

From: <https://wiki.oscardegroot.nl/> - HomeWiki

Permanent link: <https://wiki.oscardegroot.nl/doku.php?id=other:electronics:inductance-meter&rev=1716218401>

Last update: 2024/05/20 15:20



